STOREX

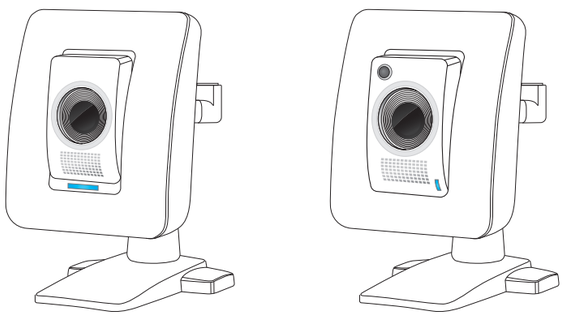

D-10H **DN-20H**

Network Camera
Quick Installation Guide

Video Installation: http://installipcam.storex.eu

Package Contents

Please check the package contents on your hand. If anything is missing, please don't hesitate to contact your local distributor.

Network Camera

RJ-45 LAN Cable



Power Adaptor (5V, 2A)

Quick Start Guide



Installation CD



Screw for Ceiling Mount x 3
Screw Anchor x 3

Camera Layout

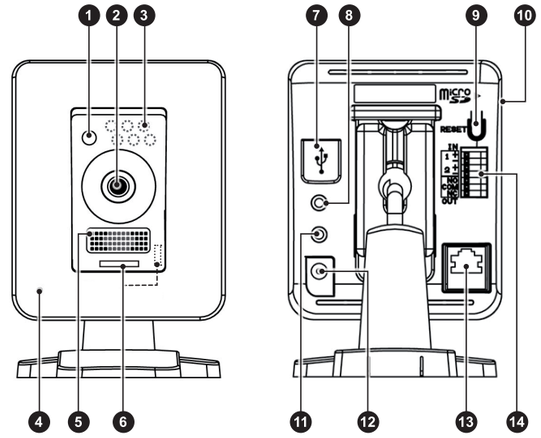

1. Light sensor (only on DN-20H)
2. Lens
3. IR Lamp x 6 (only on DN-20H)
4. Microphone
5. Speaker
6. LED status indicator (dotted line shows DN-20H LED indicator)
7. USB Wireless adaptor connector
8. Audio Output
9. Reset Button
10. microSD card slot (SDHC only on DN-20H)
11. Microphone Input
12. Power adaptor port
13. Ethernet Port
14. I/O port (2 in/1 out)

Connecting the Cables

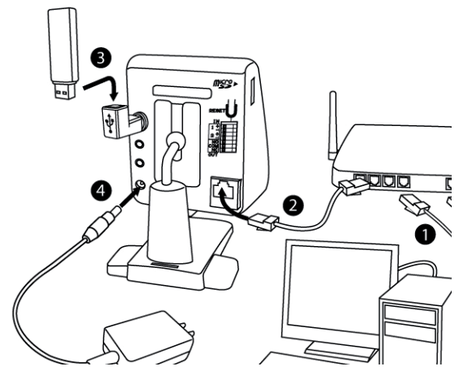

1. **PC connection:** Please connect your PC to the LAN port of your hub/router (xxx Box).
2. **Camera connection:** Use the bundled RJ-45 LAN cable to connect the LAN port of the IP camera to the LAN port of your hub/router.
3. **Wireless adaptor (optional accessory):** If you have purchased the Storex USB wireless adaptor, plug it into the USB port of IP camera. Please do not use other USB adaptors on your IP camera, than as recommended by Storex (to avoid compatibility problems).
4. **Power:** Attach the cord power to the camera and connect the power plug to a power outlet.

Package Contents

Follow the steps below to mount the camera on a flat surface. Then adjust the camera to the desired viewing angle.

1. Detach the metal mounting plate from the bracket by inserting a flat blade screwdriver into the rectangular hole on the wide end of the bracket base and then pressing the screwdriver downward.

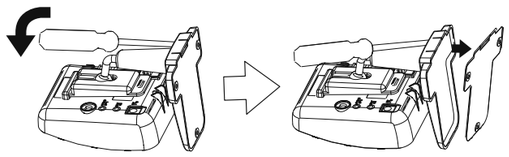

2. Place the side of the mounting plate that has protruding screw holes against the mounting surface. Screw the mounting plate via the holes on the mounting surface. And fasten the bracket to the mounting plate by clicking the plate into position.

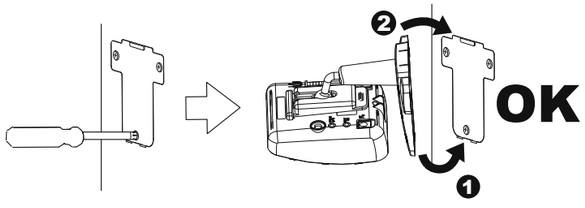

Note: When dismounting the camera, follow step 1 to detach the camera from the mounting plate. Do not pull the camera off the mounting surface by force, as doing so may damage the bracket base permanently and render future camera mounting impossible.

Installing Camera Software

1 To begin setup, insert the installation CD into your CD-ROM drive, and the iWizard will start automatically.

- If it doesn't, browse the contents of the CD and run the 'iWizard.exe'.
- If you have no CD-ROM drive, please use this link to download software installation: http://ipcam.storex.eu
- Select your language [Next]. Then choose IP camera to set up [ok]

Shows how to connect cables [Next].

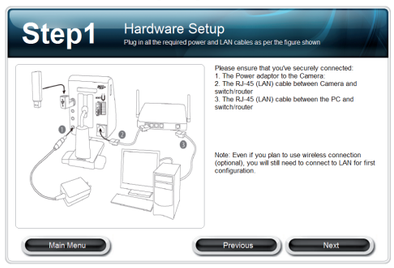
Step1
Hardware Setup
Plug in all the required power and LAN cables as per the figure shown
Please ensure that you've securely connected:
1. The Power adaptor to the Camera.
2. The RJ-45 (LAN) cable between Camera and switch/router
3. The RJ-45 (LAN) cable between the PC and switch/router
Note: Even if you plan to use wireless connection (optional), you will still need to connect to LAN for first configuration.
Main Menu
Previous
Next

- Check the LED statut [Next].

2 iWizard scan for available cameras on your local network.

- Select a camera and wait until the live video appears on the right. (You can check current settings with the camera's bottom sticker).

-You can verify FW versions from: http://ipcam.storex.eu

Click [Next] when you're ready. Meanwhile, if you see the Windows Security Alert dialog box during the search, please choose [Unblock].

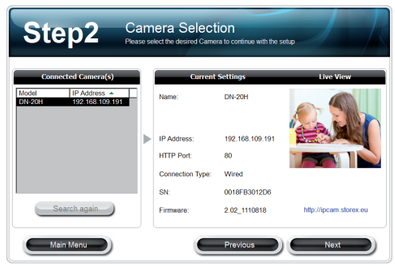

3 The default password is "admin". If you need, you can change it (please note down your new password).

- Click [Next] to skip this process.

Step3
Password Setting
Please enter a suitable password to prevent unauthorized access of your Camera
Your current password is defaulted to "admin". It is highly recommended that you change it to something more secure.
Default Password:
admin
New Password:
Confirm Password:
Note: Please use the standard A ~ Z and 0 ~ 9 characters for the password.
Main Menu
Previous
Next

4 - Check the camera name, date and time setting.

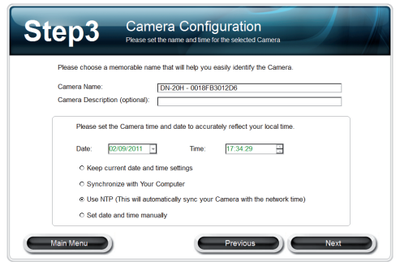
Step3
Camera Configuration
Please set the name and time for the selected Camera
Please choose a memorable name that will help you easily identify the Camera.
Camera Name:
DN-20H - 0018FB3012D6
Camera Description (optional):
Please set the Camera time and date to accurately reflect your local time.
Date:
02/09/2011
Time:
17:34:29
Keep current date and time settings
Synchronize with Your Computer
Use NTP (This will automatically sync your Camera with the network time)
Set date and time manually
Main Menu
Previous
Next

5 Choose whether to use Seedonk service to remotely access your camera. You may also use a different Seedonk server by clicking on [Advanced Settings].

Step3
Seedonk Setup
By enabling Seedonk service, you will be able to connect your Camera instantly to the Internet on P&P without extensive network configurations (Plug & Play - Zero Config)
Do you wish to setup the Seedonk P&P service (Plug & Play)?
No
Seedonk helps you get more from your IP Camera. With Seedonk, you can easily view, manage, and share your Camera securely over the Internet. Seedonk's suite of Apps (iPhone, Android, Facebook, Web, and IM) keep your Cameras always accessible right at your finger tips.
Mobile Apps (iPhone/Android)
Seedonk Messenger
Web Client
Social Web (Facebook App)
Advanced Settings
Main Menu
Previous
Next

6 Select "obtain IP address automatically" for DHCP mode.
Or configure manually your IP address with your connection port and local power line frequency. (If you enabled Seedonk service, you will not see connection port and power line frequency setting.)

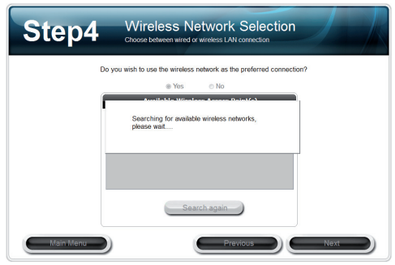

7 (Skip this step if you are not using wireless connection).
If you have purchased Storex wireless adaptor and connected to your IP camera, you can choose wireless mode by default. iWizard will search for available access points. Then select the one you want to use.

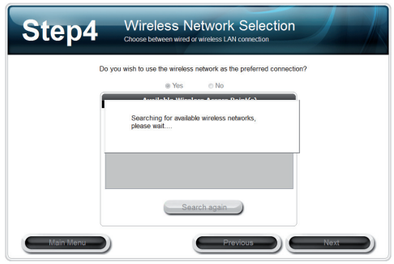

8 Enter the correct "passphrase" and choose the IP address configuration (DHCP mode or Advanced settings).

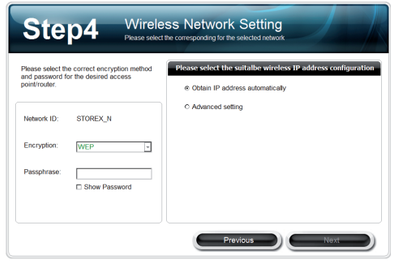

9 For Seedonk Setup, choose between:
A - Select «I already have a Seedonk Account». Click [Next], then enter your Seedonk User Name and Password

B - Select «i need to create a new Seedonk Account». Click [Next], then continue your account registration.

Step5
Seedonk Setup
In order to use Seedonk to manage your Camera, you need to have a valid Seedonk Account
Account Registration
I already have a Seedonk Account
I need to create a new Seedonk Account
Main Menu
Previous
Next

(If you already have Seedonk Messenger installed on your computer, this screen will not appear).
After logging to your new Seedonk account, you may click on [Download and Install] to install Seedonk Messenger.
Or click on [Next] to install it later manually.

Step5
Seedonk Messenger Installation
Please download and install the latest version of the Seedonk Messenger
With the Seedonk Messenger, you can easily from your PC, view and record your live Camera configure its settings, and share it with friends and family from anywhere in the world!
Install
Main Menu
Previous
Next

10 The iWizard starts programming your camera based on your settings. Please wait patiently and DO NOT interrupt the process. (If you chose not to use Seedonk service, you'll get to review your settings before saving them.)

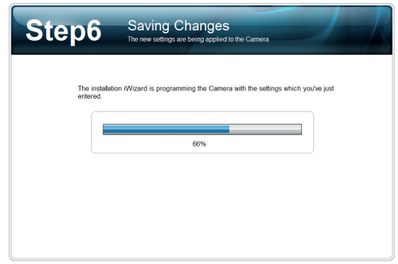
Step6
Saving Changes
The new settings are being applied to the Camera
The installation iWizard is programming the Camera with the settings which you've just entered.
66%

11 The iWizard performs system diagnosis based on your network settings and alerts you for inappropriate settings (which are marked with a question mark icon).

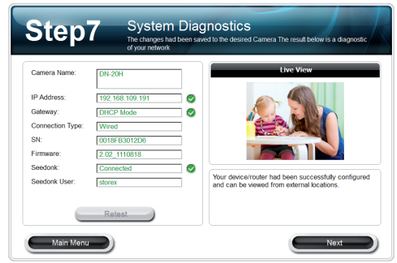

12 The iWizard indicates the setup has completed successfully. You can click on the URL to view the live video now. Click [Yes] if you wish you set up another camera from scratch.

Step8
Multi-Camera Setup
If you wish to setup another Camera at this time, you may do so by pressing the Yes button
Congratulations, you had successfully setup the Camera. You can start using the device by enter the IP address into the web browser.
http://192.168.109.155:80
Do you wish to setup another Camera?
Yes
No
Main Menu

Accessing the Camera via Internet Explorer

Please follow the steps below to access your IP camera via the Web Browser of your Internet Explorer:

1. Open the Internet Explorer.
2. Enter the camera's IP address in the address bar. (e.g. 192.168.0.100)
3. A dialog box appears to enter a valid User Name and Password; then press [OK].

The default User Name and Password are both "admin".

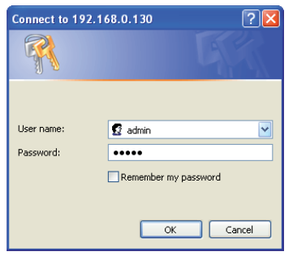

4. After logging in your Account, Internet Explorer will prompt the installation of camera software from Storex.
5. Click on the warning message and choose to install the ActiveX.

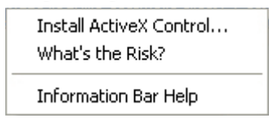

6. A dialog box will appear again to reconfirm the installation of ActiveX.
- Click [Install] for each of the following dialogs:

A. StorexActiveX.cab

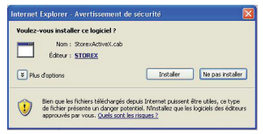
Internet Explorer - Avertissement de sécurité
Voulez-vous installer ce logiciel ?
Nom : StorexActiveX.cab
Éditeur : STOREX
Plus d'options
Installer
Ne pas installer
Bien que les fichiers téléchargés depuis Internet puissent être utiles, ce type de fichier présente un danger potentiel. N'installez que les logiciels des éditeurs approuvés par vous. Quels sont les risques ?

B. IPCamClientActivex.cab


Internet Explorer - Avertissement de sécurité
Voulez-vous installer ce logiciel ?
Nom : IPCamClientActiveX.cab
Éditeur : STOREX
Plus d'options
Installer
Ne pas installer
Bien que les fichiers téléchargés depuis Internet puissent être utiles, ce type de fichier présente un danger potentiel. N'installez que les logiciels des éditeurs approuvés par vous. Quels sont les risques ?

7. Meanwhile, the Windows Security Alert dialog may appear. Please click [Unblock] to unblock it from firewall.
8. Now you can start using your Internet Explorer's Web Browser to watch the live video and manage IP camera.

STOREX

Visit the STOREX website http://ipcam.storex.eu and then select you IP camera model. You will be able to download the latest full version of the user´s manual and the software updates.

For any technical support or repair requests, please fill out the Technical Support contact at the following address: support.uk@storex.eu

The guarantee from STOREX is valid for 1 year for the device, and 3 months for any accessories (power supply, CPL...).

STOREX guarantees your device against any manufacturing or assembly faults. This guarantee only applies to the first purchase of the device by an end user and it's not transferable if the device is resold. This warranty does not cover any incompatibilities found by end user apart from the recommendations specified on the packaging, or any other incompatibility generated by other hardware or software solution.

The guarantee does not cover failures or defects induced by non-compliance to this manual's instructions, including alteration, improper installation/ maintenance, reparation, inadequate tests, accident or external factor such as – excessive heat or humidity or power failures.

The only contractual obligation endorsed by STOREX pertains to the reparation or replacement of a defective product.

This guarantee of your device is clearly defined and cannot be modified, decreased or increased without written consent from STOREX.

This warranty covers only your device and is governed by French law.

Note: STOREX™ reserves the right to modify the user manual without prior notice according to the product's development and any updates.

STOREX is the registered logo of Storex.
seedonk and Seedonk Messenger are registered trademarks of Seedonk Inc.
All other company and product names mentioned in this document are registered trademarks of the respective companies.

P/N: 3GA0310772